




POCKET BAG FILTER SPECIFICATIONS

VP40 Pocket Bag Filter

Filter technical data according to DIN 24 185, ASHRAE-Standard 52-76, EUROVENT 4/5 1979, JIS 9908 #2, and EN 779		Fine Air Filter
Media Efficiency		G4
Bag size	mm	595x595x600 deep (6 pkt)
Rated air flow per unit at test	m³/h	3400
Net effective filtering area at test	m²	4.3
Initial pressure loss (at 100% rated air flow)	Pa	33
Final pressure loss (at 100% rated air flow)	Pa	250
Air velocity @ test	m/s	2.6
Average Arrestance	%	93
Dust holding capacity per bag	gms	1305
Temperature resistance		100 C - surge 120 C
Fibre bonding		thermally bonded

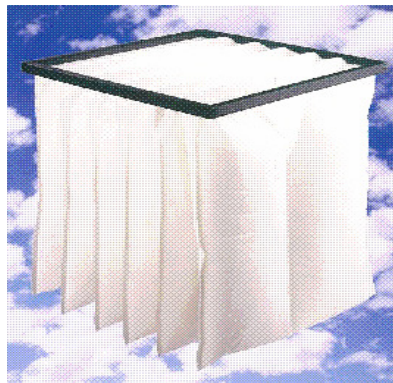

Filtercorp International Limited

22-24 Bay Park Place, P O Box 66-080
Beach Haven 0749, Auckland, New Zealand
Ph: (09)481-9999 Fax: (09)483-4355
Email: akld@filtercorp.biz

152 Hazeldean Road
Addington 8024, Christchurch, New Zealand
Ph: (03)377-9200 Fax: (03)377-9212
Email: chch@filtercorp.biz

Web site: <http://www.filtercorp.biz>