





POCKET BAG FILTER SPECIFICATIONS

VP50 Pocket Bag Filter

Filter technical data according to DIN 24 185, ASHRAE-Standard 52-76, EUROVENT 4/5 1979, JIS 9908 #2, and EN 779		Fine Air Filter
Media Efficiency		F5
Bag size	mm	595x595x600 deep (6 pkt)
Related air flow per unit at test	m³/h	3400
Net effective filtering area at test	m²	4.3
Initial pressure loss (at 100% rated air flow)	Pa	43
Final pressure loss (at 100% rated air flow)	Pa	450
Air velocity @ test	m/s	2.6
Average Arrestance	%	95
Average atmospheric dust spot efficiency	%	47
Dust holding capacity per bag	gms	955
Temperature resistance		100 C - surge 120 C
Fibre bonding		thermally bonded

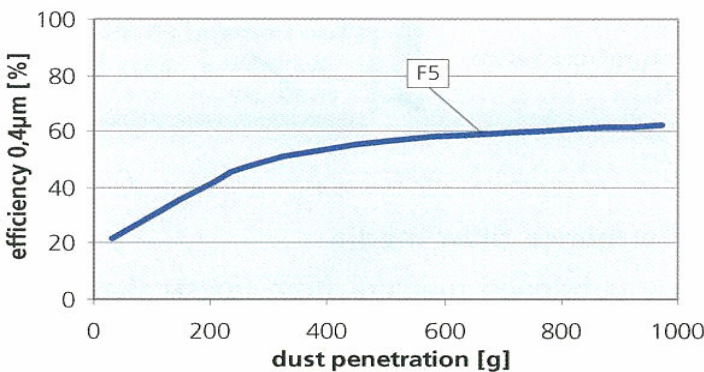

Filtercorp International Limited

22-24 Bay Park Place, P O Box 66-080
Beach Haven, Auckland, New Zealand
Ph: (09)481-9999 Fax: (09)483-4355
Email: akld@filtercorp.biz

152 Hazeldean Road
Addington, Christchurch, New Zealand
Ph: (03)377-9200 Fax: (03)377-9212
Email: chch@filtercorp.biz

Web site: <http://www.filtercorp.biz>